# CJ1W-ETN21

CSM\_CJ1W-ETN21\_DS\_E\_6\_1

# Organically Connect the Production Site and Management

 Select the required communications services according to application needs to flexibly integrate PLCs with an Ethernet information network.




CJ1W-ETN21

### **Features**

- Use Ethernet to implement various communications protocols.
- Implement FINS message communications using UDP/IP or TCP/IP with a user application on a host computer or with Support Software, such as the CX-Programmer.
- Use the clock on an SNTP server to automatically adjust the clocks in the PLCs connected to the Ethernet network. (An SNTP server is required separately.)
- An FTP server is built in, so files can be used to transfer PLC data between network PLCs and workstations or personal computers with an FTP client.
- Email can be used to send commands to the PLCs, or triggers can be set so that the PLCs will send PLC data or Ethernet Unit status to a host computer.
- The standard UDP/IP and TCP/IP protocols are supported to enable communications with a wide range of devices, workstations, personal computers, and Ethernet modules from other manufacturers.
- The SMTP/POP3/SNTP servers enable the use of host names instead of IP addresses. (A DNS server is required separately.)

### **System Configuration**

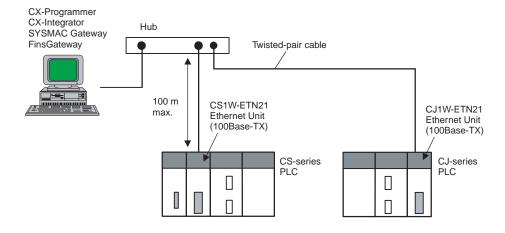

### **Ordering Information**

### **International Standards**

- The standards are abbreviated as follows: U: UL, U1: UL (Class I Division 2 Products for Hazardous Locations), C: CSA, UC: cULus, UC1: cULus (Class I Division 2 Products for Hazardous Locations), CU: cUL, N: NK, L: Lloyd, and CE: EC Directives.
- Contact your OMRON representative for further details and applicable conditions for these standards.

#### **Ethernet Unit**

Unit tuno	Product	Specifications			No. of unit	Current consumption (A)		Model	Standards
Unit type	name Communic tions cable		Communications functions	Units per CPU Unit	numbers allocated	5 V	24 V	Model	Standards
CJ1 CPU Bus Unit	Ethernet Unit	100Base-TX	FINS communications service (TCP/IP, UDP/IP), FTP server functions, socket services, mail transmission service, mail reception (remote command receive), automatic adjustment of PLC's built-in clock, server/host name specifications	4 *	1	0.37	-	CJ1W-ETN21	UC1, N, L, CE

- Note: 1. There is no accessory for the CJ-series Ethernet Unit.
  2. This unit cannot be used with the Machine Automation Controller NJ-series.
- $^{\star}\,$  Up to three Ethernet Units can be connected to a CJ1M-CPU1  $\square\text{-}\text{ETN}$  CPU Unit.

### **Industrial Switching Hubs**

	Appearance	Specifications				Current		
Product name		Functions	No. of pors	Failure detection	Accessories	consumption (A)	Model	Standards
		EtherNet/IP control data priority	3	No	Power supply connector	0.22	W4S1-03B	UC, CE
Industrial Switching Hubs  EtherNet/IP control data priority Failure detection: Broadcast storm and LSI error detection 10/100BASE-TX, Auto-Negotiation			5	No		0.22	W4S1-05B	
	5	Yes	Power supply connector     Connector for informing error	0.22	W4S1-05C	CE		

### **Recommended Network Devices**

The following products are recommended for use with the Ethernet Unit.

P	art	Maker	Model number	Contact phone
		Tonichi Kyosan Cable, Ltd.	NETSTAR-C5E SAB 0.5 × 4P	Kanetsu Planning Department
Sizes and	Cables	Kuramo Electric Co., Ltd.	KETH-SB	Kuramo Electric Co., Ltd.
conductor pairs: AWG 24 × 4 pairs		SWCC Showa Cable Systems Co. Ltd.	FAE-5004	SWCC Showa Cable Systems Co. Ltd.
	RJ45 Connectors	Panduit Corporation	MPS588	Panduit Corporation, Japan Branch, Osaka Sales Office
Sizes and	Cables	Kuramo Electric Co., Ltd.	KETH-PSB-OMR	Kuramo Electric Co., Ltd.
conductor pairs: AWG 22 × 2 pairs	RJ45 Assembly Connectors	OMRON	XS6G-T421-1	OMRON Corporation, Customer Support Center
Sizes and	Cables	Fujikura Ltd.	F-LINK-E 0.5mm × 4P	Kanetsu Planning Department
conductor pairs: 0.5 mm × 4 pairs	RJ45 Connectors	Panduit Corporation	MPS588	Panduit Corporation, Japan Branch, Osaka Sales Office
Boots	•	TSUKO	MK Boots (VI) LB	TSUKO

### **Mountable Racks**

	NJ sy	NJ system		CJ system (CJ1, CJ2)		NSJ system	
Model	CPU Rack	Expansion Rack	CPU Rack	Expansion Backplane	CP1H PLC	NSJ Controller	Expansion Backplane
CJ1W-ETN21	Not Supported		4 Units (per	CPU Unit) *1	2 Units *2	Not supported	4 Units *3

<sup>\*1.</sup> Up to three Ethernet Units can be connected to a CJ1M-CPU1□-ETN CPU Unit.

### **Ethernet Units Specifications**

	Item	Specifications				
Model number		CJ1W-ETN21				
Туре		100Base-TX (Can be used as 10Base-T)				
Applicable PLCs		CJ-series PLCs				
Unit classificati	on	CJ-series CPU Bus Unit				
Mounting locati	ion	CPU Rack or Expansion Rack				
Number of Unit	s that can be mounted	4 max. (including Expansion Racks)				
	Media access method	CSMA/CD				
	Modulation method	Baseband				
	Transmission paths	Star form				
	Baud rate	100 Mbit/s (100Base-TX)	10 Mbit/s (10Base-TX)			
Transfer specifications	Transmission media	Unshielded twisted-pair (UDP) cable Categories: 5, 5e Shielded twisted-pair (STP) cable Categories: 100 $\Omega$ at 5, 5e	Unshielded twisted-pair (UDP) cable Categories: 3, 4, 5, 5e Shielded twisted-pair (STP) cable Categories: $100 \Omega$ at 3, 4, 5, 5e			
	Transmission distance	100 m (distance between hub and node)				
Number of cascade connections		No restrictions if switching hubs are used.				
Current consumption (Unit)		370 mA max. at 5 V DC				
Weight		100 g max.				
Dimensions		31 × 90 × 65 mm (W × H × D)				
Other general s	pecifications	Other specifications conform to the general specifications of the CJ-series.				

<sup>\*2.</sup> A CP1W-EXT01 CJ Unit Adaptor is required.
\*3. If an Expansion Rack is used, the NSJW-CLK21-V1 or NSJW-ETN21 cannot be mounted to the NSJ Controller.


## **Communications Specifications**

	Item	Ethernet Unit			
Model number		CJ1W-ETN21			
Physical layer		100BASE-TX, 10BASE-T			
Number of nodes o	n FINS network	254			
Server specification	n	Specification by IP address or host name specifications (DNS client function)			
	FINS communications service	FINS/UDP FINS/TCP			
	FTP server function	The CPU Unit's file memory (Memory Card or EM file memory) can be read/written.			
	Automatic clock information adjustment	The CPU Unit's internal clock data can be automatically adjusted to the clock data received from the SNTP server			
	Web functions	The Unit settings can be made and status can be read from the Web browser using the Web server.			
	Mail functions	Mail send functions Mail receive functions			
	Socket service function	TCP socket services UDP socket services			
		RESET			
		CONTROLLER DATA READ			
		CONTROLLER STATUS READ			
		ECHOBACK TEST			
		BROADCAST TEST (READ RESULTS)			
		BROADCAST TEST (SEND TEST DATA)			
		ERROR LOG READ			
		ERROR LOG CLEAR			
		REQUEST TO OPEN UDP SOCKET			
Communications		REQUEST TO RECEIVE UDP SOCKET			
service		REQUEST TO SEND UDP SOCKET			
		REQUEST TO CLOSE UDP SOCKET			
		REQUEST TO OPEN TCP SOCKET (PASSIVE)			
		REQUEST TO OPEN TCP SOCKET (ACTIVE)			
	FINS commands	REQUEST TO RECEIVE TCP SOCKET			
		REQUEST TO SEND TCP SOCKET			
		REQUEST TO CLOSE TCP SOCKET			
		EXECUTE PING COMMAND			
		REQUEST TO CHANGE REMOTE NODE FOR FINS/TCP CONNECTION			
		REQUEST TO READ STATUS FOR FINS/TCP CONNECTION			
		IP ADDRESS TABLE WRITE			
		IP ADDRESS WRITE			
		IP ADDRESS TABLE READ			
		IP ROUTING TABLE READ			
		PROTOCOL STATUS READ			
		MEMORY STATUS READ			
		SOCKET STATUS READ			
		ADDRESS DATA READ			
		IP ADDRESS READ			


4

### **External Interface**

#### CJ1W-ETN21



Each communications device connected to the Ethernet network is allocated a unique Ethernet address. For the Ethernet Unit, this Ethernet address is shown on the right side of the Unit as a 12-digit hexadecimal number.



### **Ethernet Connectors**

The following standards and specifications apply to the connectors for the Ethernet twisted-pair cable.

• Electrical specifications: Conforming to IEEE802.3 standards.

• Connector structure: RJ45 8-pin Modular Connector (conforming to ISO 8877)



Connector pin	Signal name	Abbr.	Signal direction
1	Transmission data +	TD+	Output
2	Transmission data –	TD-	Output
3	Reception data +	RD+	Input
4	Not used.	_	_
5	Not used.	-	-
6	Reception data –	RD-	Input
7	Not used.	_	_
8	Not used.	-	-
Hood	Frame ground	FG	-

## **Unit Version Upgrade Information**

### **Unit Version 1.3**

Upgrade	Details		
Web function added	The unit settings and status monitoring for the Ethernet Unit can be easily performed from a Web browser.		
Function prohibiting access using FINS/ UDP from nodes with dynamically changed IP addresses	Access to change the remote IP address from a node using FINS/UDP can be prohibited (IP address protection).		

### **Unit Version 1.4**

Upgrade	Details
ETN11-compatible mode added to the ETN21 settings for FINS/UDP.	A mode compatible with the CS1W-ETN11/CJ1W-ETN11 was added in the operating specifications for FINS/UDP messages sent from a different UDP port number than the FINS/UDP port number set in the Ethernet Unit.

### **Unit Version 1.5**


Upgrade	Details
CIDR function added to subnet mask settings	An option setting was added to the subnet mask settings to enable CIDR. Enabling CIDR allows you to use classless IP addresses in the subnet mask setting.
High-speed option added for socket service	This option can be set to improve communications performance for the socket service that is implemented by manipulating dedicated control bits. The performance is the same as the previous version if this option is not set.
Linger option added to socket options for TCP open requests.	A linger option can now be set in the options for passive or active TCP open requests.
Location of node address switches changed on CJ1W-ETN21	The location of the node address switches was changed. The setting method and setting range remain the same.


Note: CX-Programmer version 8.2 or higher is required for unit version 1.5 functions.

Dimensions (Unit: mm)

### CJ1W-ETN21







### **Related Manuals**

Man.No.	Model	Name	Contents
W420	CS1W-ETN21 CJ1W-ETN21	Ethernet Units Operation Manual Construction of Networks	Provides information on operating and installing 100Base-TX Ethernet Units, including details on basic settings and FINS communications.  Refer to the Communications Commands Reference Manual (W342) for details on FINS commands that can be sent to CS-series and CJ-series CPU Units when using the FINS communications service.
W421	CS1W-ETN21 CJ1W-ETN21	Ethernet Units Operation Manual Construction of Applications	Provides information on constructing host applications for 100Base-TX Ethernet Units, including functions for sending/receiving mail, socket service, automatic clock adjustment, FTP server functions, and FINS communications.
W342	CS1G/H-CPU H CS1G/H-CPU EV1 CS1D-CPU S CJ1M-CPU S CJ1M-CPU CS1W-SCU21-V1 CS1W-SCB21-V1/41-V1 CJ1G/H-CPU P CJ1G-CPU CCCUCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC	Communications Commands Reference Manual	Describes the C-series (Host Link) and FINS communications commands used when sending communications commands to CS-series and CJ-series CPU Units.
W463	CXONE-AL C-V AL D-V	CX-One Setup Manual	Describes operating procedures for the CX-One FA Integrated Tool Package. Refer to this manual for operating procedures for the CX-One FA Integrated Tool Package.
W464	CXONE-AL□□C-V□/ CXONE-AL□□D-V□	CS/CJ/CP/NSJ-series CX-Integrator Network Configuration Software Operation Manual	Describes the operating procedures for the CX-Integrator.

#### Terms and Conditions Agreement

#### Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

#### Warranties.

- (a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.
- (b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE

PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See http://www.omron.com/global/ or contact your Omron representative for published information.

#### Limitation on Liability; Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

### Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

### Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

#### Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

Errors and Omissions.
Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

2015.7

In the interest of product improvement, specifications are subject to change without notice.

